

回轉式系列
Live centers series


重負荷
Heavy duty

> JK-562 SERIES

強力回轉頂針

HEAVY DUTY STRONG LIVE CENTER

- ◎ 適用: CNC車床、高速車床及外徑磨床。
Application CNC lathe, high speed lathe, cylindrical grinding machine
- ◎ 用途: 適用一般長軸心強力車削加工。
Working Usage Applicable for ordinary length workpiece strong turning process
- ◎ 結構: 前後滾針軸承, 加止推軸承, 特殊設計製成。
Structure Combination of thrust bearing and needle bearing at front and rear place
- ◎ 精準度: 0.002以內
TIR Less than 0.002mm

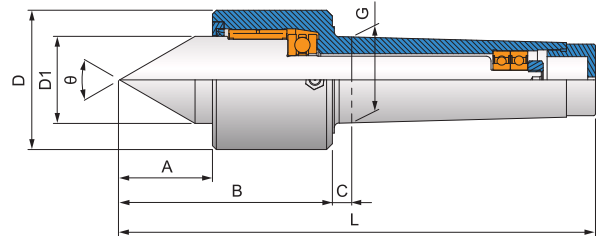

規格 / Specification 單位/UNIT: mm


型式/外表尺寸 Model/Spec	A	B	C	D	D1	G	L	θ	軸承最高轉數 Max. RPM	軸承徑向力 (載重) Max. radial load	軸承軸向力 (推力) Max. axial thrust force
JK-562-4	42	99	9	57	35	31.267(MT4)	207	60°	4,500 rpm	1,500 kg	2,250 kg
JK-562-5	51	119	9	72	45	44.399(MT5)	254	60°	4,000 rpm	2,300 kg	2,760 kg
JK-562-6	64	142	10	93	60	63.348(MT6)	332	60°	3,000 rpm	4,200 kg	4,850 kg

> SC-62 SERIES

重負荷回轉頂針

HEAVY DUTY LIVE CENTER

- ◎ 適用: CNC車床、高速車床及其他機床。
Application CNC lathe, high speed lathe, other lathe machine
- ◎ 用途: 適用長度400mm以內, 一般強力車削加工。
Working Usage Applicable for the length less than 400mm ordinary strong turning process
- ◎ 結構: 採用雙列滾珠精密軸承, 止推軸承, 滾針軸承
Structure 特殊設計製成。
Combination of double row precise ball bearing and thrust bearing and needle bearing
- ◎ 選配: SC-62-H-4A/5A:Y型扳手
Accessories For SC-62-H-4A/5A :Y type spanner
- ◎ 精準度: 0.002以內
TIR Less than 0.002mm

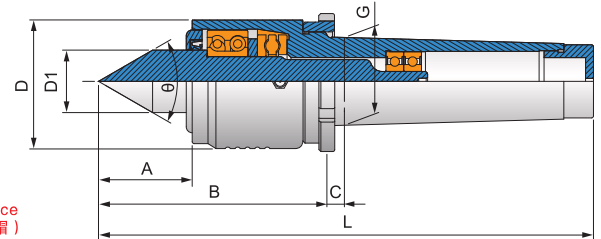

規格 / Specification 單位/UNIT: mm

S light type for slender workpiece
另有同規格輕負荷 (S型, 無螺帽)
可改善細長工件加工易變形問題

型式/外表尺寸 Model/Spec	A	B	C	D	D1	G	L	θ	軸承最高轉數 Max. RPM	軸承徑向力 (載重) Max. radial load	軸承軸向力 (推力) Max. axial thrust force
SC-62-H-3	48	104	9	62	31.2	23.825(MT3)	212	60°	4,000 rpm	1,430 kg	2,700 kg
SC-62-H-4	48	104	9	62	31.2	31.267(MT4)	212	60°	4,000 rpm	1,430 kg	2,700 kg
SC-62-H-5	48	104	9	62	31.2	44.399(MT5)	239	60°	4,000 rpm	1,430 kg	2,700 kg
SC-62-H-3A	48	116	5	62	31.2	23.825(MT3)	224	60°	4,000 rpm	1,430 kg	2,700 kg
SC-62-H-4A	48	116	5	62	31.2	31.267(MT4)	224	60°	4,000 rpm	1,430 kg	2,700 kg
SC-62-H-5A	48	116	5	62	31.2	44.399(MT5)	251	60°	4,000 rpm	1,430 kg	2,700 kg