



分度頭

SEMI-UNIVERSAL DIVIDING HEAD

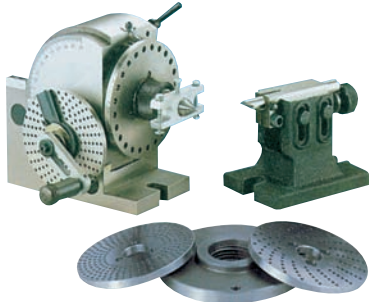

OPTIONAL ACCESSORY:
3-jaw chuck: 4" or 5"3-jaw Chuck for BS-0,5" or 6"3-jaw Chuck for BS-1

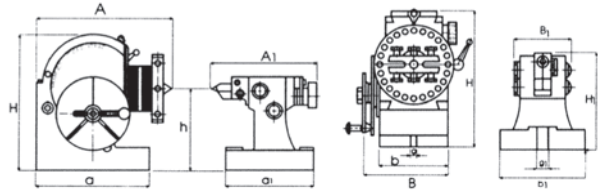

Unit:mm

型號 Model	A	B	H	h	a	b	g	中心孔 Center	軸孔徑 Dia. of spindle hole	重量 N.W.
BS-0	196	133	173	100	160	91	16	25	16	22
BS-1	253	163	220	126	207	114	16	25	20	36


型號 Model	A1	B1	H1	h	a1	b1	g1
BS-0	182	82	123	100	155	110	16
BS-1	182	82	133	126	155	110	16

萬能分度頭

UNIVERSAL DIVIDING HEAD



OPTIONAL ACCESSORY:
3-jaw chuck: 6" or 7"3-jaw Chuck for BS-2

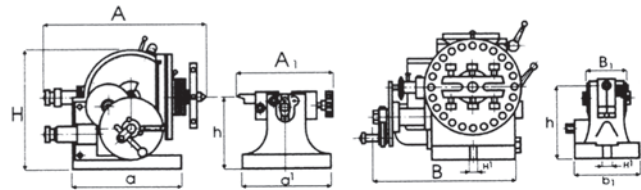


Unit:mm

型號 Model	A	B	H	h	a	b	g	中心孔 Center	軸孔徑 Dia. of spindle hole	重量 N.W.
BS-2	365	272	236	135	213	134	16	25	25.4	73

型號 Model	A1	B1	H1	h	a1	b1	g1
BS-2	182	88	156	135	175	124	16

多功能尾座

UNIVERSAL TAIL STOCK

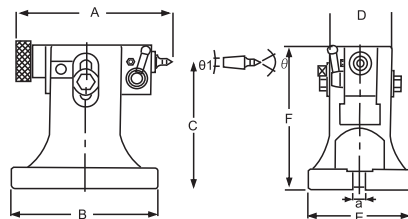

特點:

- 1、多功能尾座，係集多種尾座之特點設計而成，使用方便，結構穩固經久耐用，可替代各型式尾座使用。
- 2、尾座採用可調式裝置，可隨心所欲，方便調整上下高度，輕而易舉。
- 3、頂針與主軸採用分離式，可配合替換各種類型頂針使用，（附標準頂針一支）可適用任何心軸，或不同類型之加工，為其他廠牌所不及。

FEATURES:

1. The multifunction tail stock adopts the merits of various tail stock's design. It is convenient for using, sturdy and durable. It can replace other tail stocks.
2. The top-bar and main shaft are separate. Users can use other top-bars. (we attach a standard top bar). It is suitable for any axes or various processing types. This design of our machine is better than those of other machines.

Unit:mm

型號 Model	A	B	最高 HIGHEST	C	最低 LOWEST	D	E	F	a	θ1	θ	重量 N.W.
TS-6"	192	180	170	155	140	76	126	175	16	10°	60°	9
TS-8"	192	180	195	180	165	76	126	200	16	10°	60°	10

