




# 自定心中心架

## SELF-CENTERING STEADY REST

### OMSR-A型

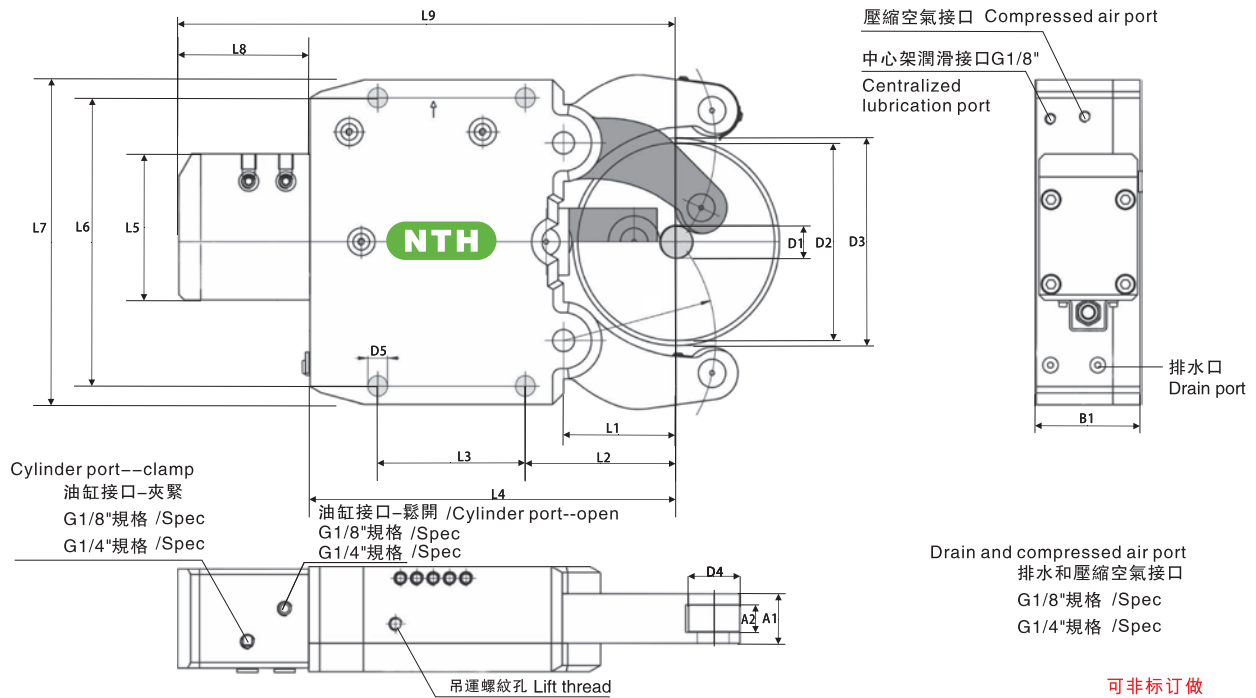

可非标订做  
Non-standard requirements can be made

NTH-OMSR 型號/Model 規格/Spec	OMSR-A 1	OMSR-A 2	OMSR-A 3	OMSR-A 4	OMSR-A 5	OMSR-A 6	OMSR-A 7	OMSR-A 8
D1 (mm)	6	8	12	20	50	30	50	85
D2 (mm)	70	101	152	162	200	245	310	350
D3 (mm)	76	105	162	170	202	252	318	352
D4 (mm)	24	35	47	47	47	52	62	62
D5 (mm)	11	14	18	18	18	18	24	24
L1 (mm)	37	51	85	93	103	128	160	180
L2 (mm)	52	70	115	123	138	146	178	198
L3 (mm)	66	85	135	135	135	240	270	270
L4 (mm)	149	195	312	320	335	448	510	530
L5 (mm)	82	103	138	138	138	152	160	160
L6 (mm)	140	170	262	262	262	262	400	400
L7 (mm)	160	195	295	295	295	295	440	440
L8 (mm)	65.5	82	116	116	120	155	187	187
L9 (mm)	214.5	277	428	436	455	603	697	717
A1 (mm)	28	35	45	45	45	60	75	75
A2 (mm)	15	19	25	25	25	25	29	29
B1 (mm)	63	75	95	95	95	110	145	145
工作壓力最小/最大 Work pressure Min./Max. (bar)	6/70	8/70	8/80	8/80	8/80	8/80	8/80	8/80
最大夾緊力/滾軸 Max clamping force of the roller (daN)	165	450	1000	1000	1000	1000	2000	2000
整個夾持範圍的定位精度 Position accuracy within the clamping range (mm)	0.02	0.02	0.04	0.04	0.04	0.04	0.06	0.06
重復定位精度 Repeatability accuracy (mm)	0.005	0.005	0.007	0.007	0.007	0.007	0.01	0.01
滾輪最大綫速度 Max line speed of the roller (m/min)	800	800	725	725	725	715	700	700
重量 Weight (KG)	7.8	13.9	57	57	58.8	116.5	173.8	177.8

• 非标准油缸按要球订做，保留技术更改！ Cylinders differing from standard available on request, Subject to technical changes.

