


## > 3LT SERIES

### 三爪長行程中實油壓卡盤

#### 3 JAW LONG STROKE CLOSED CENTER POWER CHUCK

- ◎ 三爪超大行程中實動力夾頭
- ◎ 夾頭滑動面經硬化處理及精密研磨，并直接潤滑。
- ◎ 高剛性、高精度及高轉速。
- ◎ 3 jaw very long stroke closed center power chuck
- ◎ Matching surfaces of all parts are hardened, ground and lubricated directly
- ◎ Construction of high rigidity and high clamping accuracy and high rotary speed.

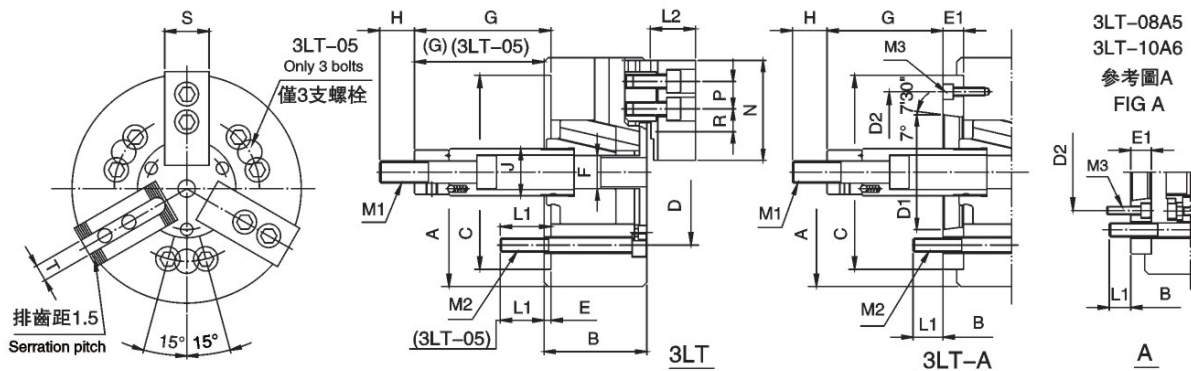

規格 Spec 型號 Model	楔心行程 Plunger stroke (mm)	爪行程直徑 Jaw stroke (Dia) (mm)	直徑夾持範圍 Clamping Range Dia. (mm)	容許油壓缸推力 Max. D.B. pull KN (Kgf)	最大夾持力 Max. clamping force KN (Kgf)	最高轉速 Max RPM	慣性矩 I Kg · m <sup>2</sup>	重量 Weight (Kg)	適合油缸 Matching Cylinder	最大使用壓力 Max. pressure Mpa (Kgf/cm <sup>2</sup> )
3LT-05	15	10.9	14-135	9.8(1000)	16.4(2550)	4500	0.02	6.5	S-80	2.3(23)
3LT-06A5	20	14.5	14-165	21.6(2200)	36(3680)	4000	0.05	14	S-100	3.0(30)
3LT-08A5	23	16.7	17-210	29.4(3000)	54.9(5600)	3500	0.14	28	S-125	2.9(29)
3LT-08A6	23	16.7	17-210	29.4(3000)	54.9(5600)	3500	0.14	27	S-125	2.9(29)
3LT-10A6	27	19.6	22-254	39.2(4000)	74(7550)	3000	0.30	42	S-150	2.8(28)
3LT-10A8	27	19.6	22-254	39.2(4000)	74(7550)	3000	0.30	40	S-150	2.8(28)
3LT-12A8	30	21.8	26-304	54(5500)	99(10100)	2500	0.73	63	S-150	3.6(36)

規格 Spec 型號 Model	A	B	B(Ap)	C(H6)	D	D1	D2	E	E1	F	G max	G max(Ap)	G min	G min(Ap)	H
3LT-05	135	55	55	80	100	-	-	7	-	-	9	9	-6	-6	35
3LT-06A5	165	74	84	140	104.8	82.56	116	5	15	22	101.5	86.5	81.5	66.5	36
3LT-08A5	210	85	103	170	133.4	82.56	104.8	5	23	24	127	104	-104	81	36
3LT-08A6	210	85	97	170	133.4	106.38	150	5	17	24	127	110	-104	81	36
3LT-10A6	254	89	109	220	171.4	106.38	133.4	5	25	32	160	133	133	106	36
3LT-10A8	254	89	102	220	171.4	139.72	190	5	18	32	160	142	133	115	36
3LT-12A8	304	106	118	220	171.4	139.72	190	6	18	32	163	145	133	115	36

規格 Spec 型號 Model	J	L1	L1(Ap)	L2	M1	M2	M3	N	P	R max	R min	S	T
3LT-05	28	14	14	32	M12X1.75	3-M8	-	62	14	13.5	6	25	10
3LT-06A5	34	14	14	39	M16X2	6-M10	3-M6	73	20	18	7.5	31	12
3LT-08A5	34	20	17	41	M20X2.5	6-M12	6-M10	95	25	22.3	11.8	35	14
3LT-08A6	38	20	18	41	M20X2.5	6-M12	3-M6	95	25	22.3	11.8	35	14
3LT-10A6	38	18	18	46	M20X2.5	6-M16	6-M12	110	30	30.8	11.3	40	16
3LT-10A8	45	18	25	46	M20X2.5	6-M16	3-M8	110	30	30.8	11.3	40	16
3LT-12A8	45	22	25	54	M20X2.5	6-M16	3-M8	130	30	48.8	12.3	50	18

\* 保留技術更改的權利，恕不另行通知 Subject to technology changes without prior information  
 \* 非標需求可訂做 Non-standard requirements can be made